

"GLORY" GLASS DESIGN



Glory 100
Glory 125
Glory 150



Glory-1



Glory-2



Glory-3



Glory-4



Glory-5



Glory-6

■ Use

- Extract fans

■ Application

- Residential premises
- Flats, cottages
- Offices
- Utility spaces
- Trade premises
- Restaurants
- Health care facilities
- Child care facilities

■ Features

- Wall mounting
- Easy maintenance
- Continuous operation
- Ball bearing motor
- Glass front cover
- Built-in 2 W LED-lamp
- 5 year warranty

■ Options




Timer

- Turn-off delay adjustable from 2 to 30 min


Humidity sensor

- Humidity setpoint adjustable from 60 % up to 90 %.
- Turn-off delay adjustable from 2 to 30 min

Model	Turn-off delay timer	Humidity sensor
Glory 100		
100 T	●	
100 H	●	●
Glory 125		
Glory 150		

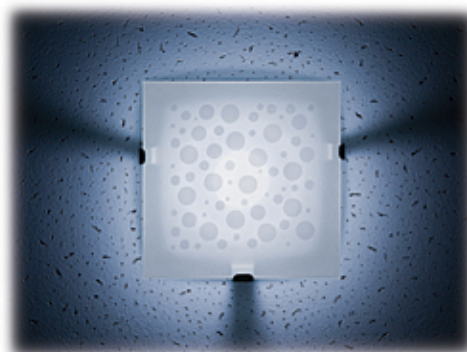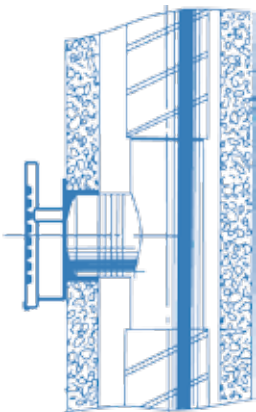


Overall and mounting dimensions

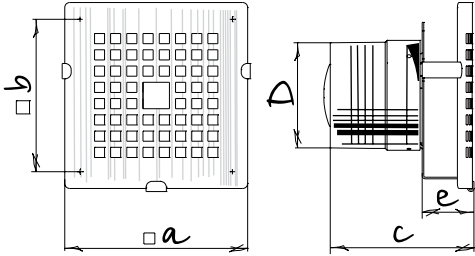

Model	Dimensions [mm]				
	a	b	c	D	e
Glory 100	180	120	143	100	49
Glory 100T	183	122	151.6	98	65
Glory 100 H	183	122	151.6	98	65
Glory 125	204	140	152	125	55
Glory 150	230	165	169	150	53

Technical data

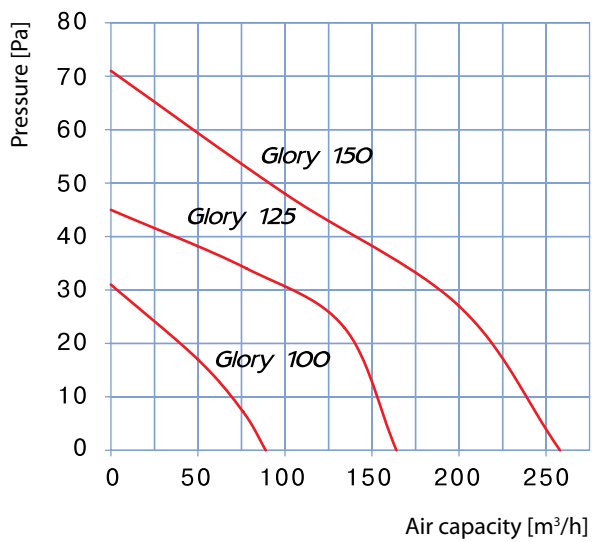

Parameters	Glory 100	Glory 125	Glory 150
Voltage [V]	220-240	220-240	220-240
Power [W]	14	16	24
Current [A]	0.085	0.1	0.13
Air capacity [m³/h]	89	164	258
Sound pressure level at 3 m [dB(A)]	33	34	37
RPM [min ⁻¹]	2300	2400	2400



Packing

