

SLIM LINE



Line 100
Line 125
Line 150

Use

- Extract fans

Application

- Residential premises
- Flats, cottages
- Offices
- Utility spaces
- Trade premises
- Restaurants
- Health care facilities
- Child care facilities

Options

Pull-cord switch

Pull-cord switch

Timer

- Turn-off delay time regulated between 2 and 3 min.


Humidity sensor

- Regulated humidity threshold from 60 to 90 %
- Turn-off delay time regulated between 2 and 3 min.


Features

- For exhaust ventilation of residential premises
- Wall surface or ceiling mounting
- Low-noise impeller
- Easy maintenance
- Continuous operation
- Backdraft damper
- Ball bearing motor

Model	Pull-cord switch	Turn-off delay timer	Humidity sensor
Line 100			
100 S	●		
100 T		●	
100 ST	●	●	
100 H		●	●
100 SH	●	●	●
Line 125			
125 S	●		
125 T		●	
125 ST	●	●	
125 H		●	●
125 SH	●	●	●
Line 150			
150 S	●		
150 T		●	
150 ST	●	●	
150 H		●	●
150 SH	●	●	●

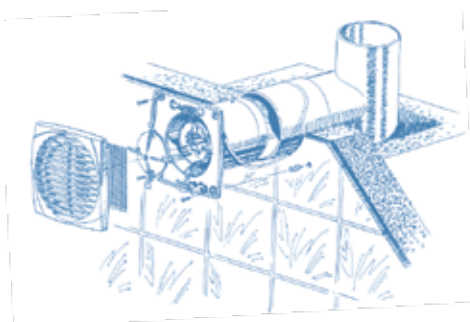


Overall and mounting dimensions

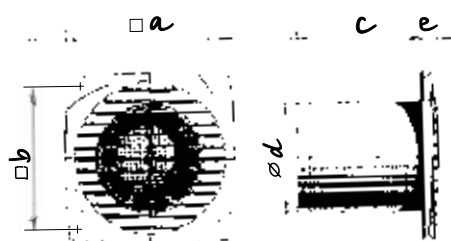

Model	Dimensions [mm]				
	a	b	c	d	e
Line 100	150	120	108.5	100	12.5
Line 125	176	140	114	125	12.5
Line 150	205	165	132	150	13

Technical data

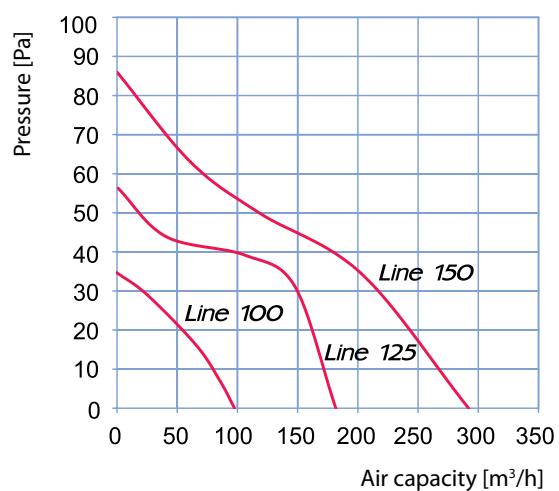

Parameters	Line 100	Line 125	Line 150
Voltage [V]	220-240	220-240	220-240
Power [W]	14	16	24
Air capacity [m³/h]	95	180	292
Sound pressure level at 3 m [dB(A)]	34	35	38
RPM [min ⁻¹]	2300	2400	2400



Packing

