


"LUX" STAINLESS STEEL DESIGN



Lux 100
Lux 125
Lux 150




Lux-1




Lux-2



Lux-3



Lux-4



Lux-5



Lux-6

Use

- Extract fans

Application

- Residential premises
- Flats, cottages
- Offices
- Utility spaces
- Trade premises
- Restaurants
- Health care facilities
- Child care facilities

Features

- Wall mounting
- Easy maintenance
- Continuous operation
- Ball bearing motor
- Stainless steel front cover
- Built-in 2W LED-lamp
- 5 year warranty

Options



Timer

- Turn-off delay adjustable from 2 to 30 min


Humidity sensor

- Humidity setpoint adjustable from 60 % up to 90 %.
- Turn-off delay adjustable from 2 to 30 min

Model	Turn-off delay timer	Humidity sensor
Lux 100		
100 T	●	
100 H	●	●
Lux 125		
Lux 150		

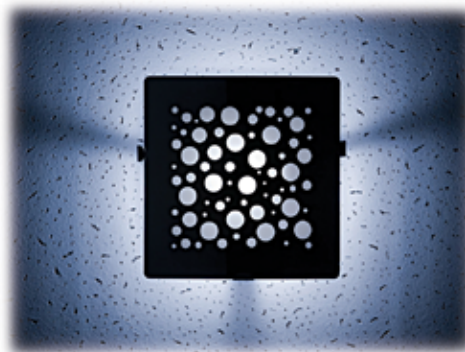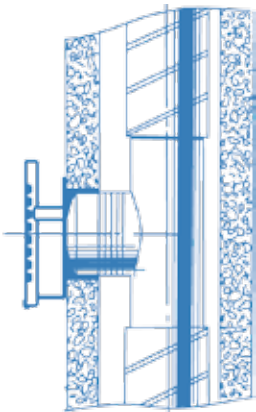


Overall and mounting dimensions

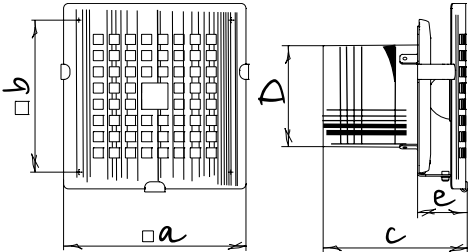

Model	Dimensions [mm]				
	a	b	c	D	e
Lux 100	180	120	143	100	49
Lux 100 T	183	122	151.6	98	65
Lux 100 H	183	122	151.6	98	65
Lux 125	204	140	152	125	55
Lux 150	230	165	169	150	53

Technical data

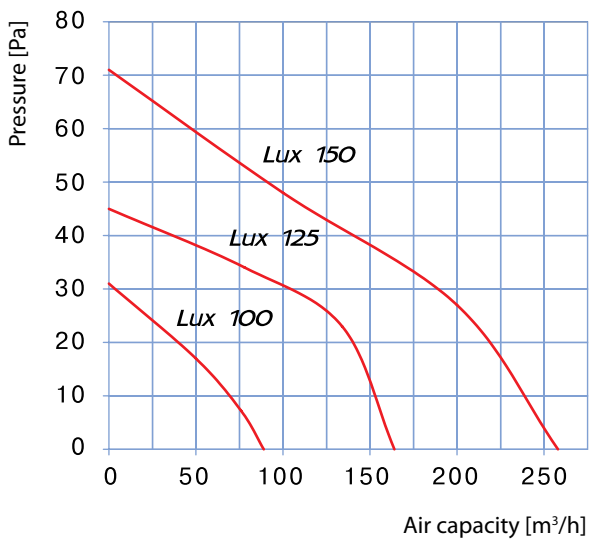

Parameters	Lux 100	Lux 125	Lux 150
Voltage [V]	220-240	220-240	220-240
Power [W]	14	16	24
Current [A]	0.085	0.1	0.13
Air capacity [m³/h]	89	164	258
Sound pressure level at 3 m [dB(A)]	33	34	37
RPM [min ⁻¹]	2300	2400	2400



Packing

